

AQUA-TECH DAM & POND SEALER




Description

Aqua-Tech Dam & Pond Sealer provides a very convenient solution for sealing a leaking dam or pond. This specially formulated granular product is designed for easy and efficient application, reducing the need to rely on large equipment, external labor or introduced bulk materials such as bentonite.

Dam & Pond Sealer encourages water use efficiency by delivering a sealing solution that relies solely on simple application methods requiring no waiting time, no extra loss of precious water and no wasteful dumping of existing water.

Dam & Pond Sealer is a blended formulation of polymer granules that are 99% water insoluble which become active immediately upon application. Dam & Pond Sealer is sucked into the dam's cracks and porous areas through hydraulic forces. This results in a positive seal caused by the massive growth of the polymer's particle size. This process is further enhanced with the packing of super fine suspended particles attracted by the unique charge built into the product.

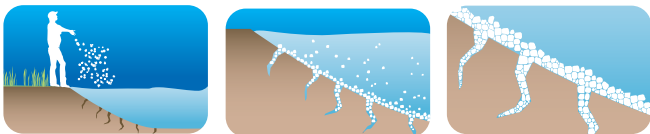

Dam & Pond Sealer is easily applied to the surface water of a dam or pond without the need for draining. If the dam is not full then Dam & Pond Sealer may be applied to the existing water level. Once the dam's top water level is achieved, a final application specifically over the untreated newly submerged banks can be carried out.

Application

Aqua-Tech Dam & Pond Sealer is spread on the surface by hand or with an approved powder applicator. It can be applied to specific problem areas if the source of the leak can be identified or the entire dam can be treated.

A minimum rate of application is 75g/m² calculated on the surface area of the dam's full water level. Aqua-Tech Dam & Pond Sealer is best applied with water temperature above 5 C and where wind conditions are moderate.

In many situations the main problem for a leaking dam is loss of water through the base. With Aqua-Tech Dam & Pond Sealer the treatment of a dam can be tailored to suit the availability of water and budget. Although application of the product is straightforward technical staff at Aqua-Tech can help work out an application method specific to each dam and particular needs.

Benefits

- 💧 Creates a seal without the need to empty precious water.
- 💧 Application of product is immediate, no site surveys or reliance on third parties required.
- 💧 Treatment can be targeted directly at a suspected problem area rather than the entire dam.



- 💧 Cost effective without the need for heavy expensive earthmoving equipment.
- 💧 Can be applied to full or partially full dams.
- 💧 Easy to apply.
- 💧 Non-toxic, biodegradable and environmentally friendly.
- 💧 Long life. Once polymers are in place they will become part of the dam structure and will take many years to break down.

Properties

Appearance	White powder/granules
pH	5-9
Solubility	Insoluble in water
Storage temperature	5-30 C
Shelf Life	5 years

More information can be found at www.triox.com.au
Information Line **1300 729 354**

Issued 1st May 2008

Triox Pty Ltd. ABN 72 068 066 446.
Suite 1, 707 Mt Alexander Road, Moonee Ponds VIC 3039.
PO Box 707 Moonee Ponds VIC 3039.
Ph: 61 3 **9372 9977** Fx: 61 3 9372 9988.
Email: philip.james@triox.com.au

AQUA-TECH® AGRI
IT'S ALL ABOUT SAVING WATER